


機種変更

別の PC に Win レコーダーX をインストールし、元々使用していた Win レコーダーX の設定を引き継ぎたい場合に使用します。

機種変更をおこなった場合、元々使用していた PC 上の Win レコーダーX の認証は解除されるため、打刻できなくなりますのでご注意ください。

サービス利用画面より、「機種変更」ボタンをクリックすると画面が表示されます。

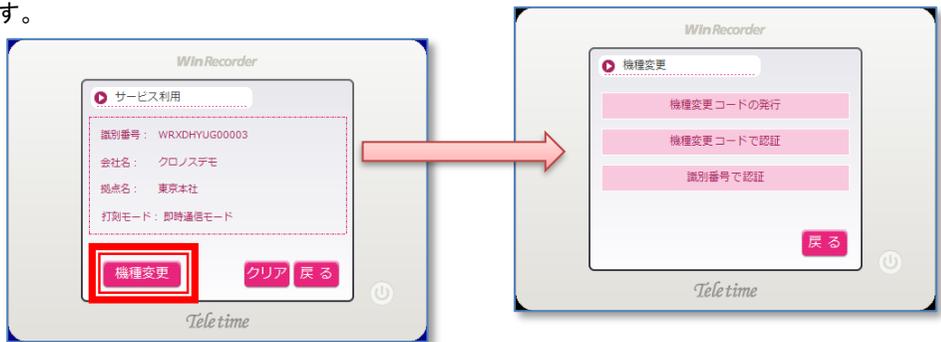

●機種変更コードを用いる場合

- ① 元々使用していた PC 上の Win レコーダーX にて「機種変更コードの発行」ボタンをクリックし、確認ポップアップで「はい」を選択します。



- ② 機種変更コードが発行されるので、この機種変更コードをコピーする等し、保持しておきます。


次の手順からは、設定を引き継ぎたい別 PC にておこないます。



- ③ Win レコーダーX をインストールした別 PC にて、「機種変更コードで認証」ボタンをクリックします。



- ④ 機種変更コードの入力画面が表示されるので、保持していた機種変更コードを入力し、「OK」をクリックします。

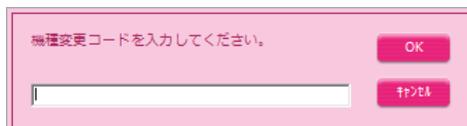

- ⑤ 認証が成功すると、右図の画面が表示されます。



● 識別番号を用いる場合

- ① 元々使用していた PC 上の Win レコーダーXにて、識別番号を確認します。



- ② 確認した識別番号をもとに、クロッシオンのシステム設定より認証状態を解除します。

※ クロッシオンの システム設定>会社情報より、契約タイムレコーダタブにて、同じ識別番号のものを選択します。




次の手順からは、設定を引き継ぎたい別 PC にておこないます。

- ③ Win レコーダーX をインストールした別 PC にて「識別番号で認証」ボタンをクリックします。



- ④ 識別番号の入力画面が表示されるので、設定を引き継ぎたい識別番号を入力し、「OK」をクリックします。

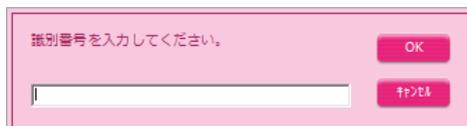

A dialog box with a pink background. At the top, it says "識別番号を入力してください。" (Please enter the identification number.). Below this is a text input field. To the right of the input field are two buttons: "OK" and "キャンセル" (Cancel).

- ⑤ 認証が成功すると、右図の画面が表示されます。



A dialog box with a pink background. At the top, it says "認証成功" (Authentication successful). Below this, it says "認証に成功しました。" (Authentication was successful.). At the bottom, there is a button labeled "閉じる" (Close).